


YC081K0VP LDMOS TRANSISTOR

Document Number: YC081K0VP
Preliminary Datasheet V1.0

1000W, 50V High Power RF LDMOS FETs

Description

The YC081K0VP is a 1000-watt capable, high performance, internally matched LDMOS FET, designed for narrow band pulsed applications with frequencies 400MHz to 800MHz.

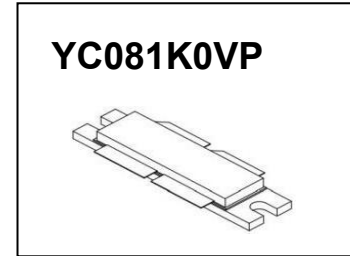

- Typical Performance (on Yingtron demo with device soldered):

Frequency: 440MHz, Vds = 50 Volts, Idq = 100 mA, TA = 25 C

Pulse condition	Gp (dB)	P _{OUT} (W)	η _D @P _{OUT} (%)
pulse width 100us duty cycle 10%	19.3	1060	68.5

Features

- High Efficiency and Linear Gain Operations
- Integrated ESD Protection
- Internally Matched for Ease of Use
- Large Positive and Negative Gate/Source Voltage Range for Improved Class C Operation
- Excellent thermal stability, low HCI drift
- Compliant to Restriction of Hazardous Substances (RoHS) Directive 2002/95/EC

Table 1. Maximum Ratings

Rating	Symbol	Value	Unit
Drain--Source Voltage	V _{DSS}	115	Vdc
Gate--Source Voltage	V _{GS}	-10 to +10	Vdc
Operating Voltage	V _{DD}	+55	Vdc
Storage Temperature Range	T _{stg}	-65 to +150	°C
Case Operating Temperature	T _C	+150	°C
Operating Junction Temperature	T _J	+225	°C

Table 2. Thermal Characteristics

Characteristic	Symbol	Value	Unit
Thermal Resistance, Junction to Case, Case Temperature 80°C, 1000W Pout, Pulse width: 100us, duty cycle: 10%, Vds=50 V, Idq = 100 mA, Frequency at 800MHz	R _{θJC}	0.02	°C/W

Table 3. ESD Protection Characteristics

Test Methodology	Class
Human Body Model (per JESD22--A114)	Class 2

Table 4. Electrical Characteristics (TA = 25 C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

DC Characteristics

Drain-Source Breakdown Voltage (V _{GS} =0V; I _D =100uA)	V _{DSS}	115	---	---	V
Zero Gate Voltage Drain Leakage Current	I _{DSS}	---	---	10	μA

YC081K0VP LDMOS TRANSISTOR

Document Number: YC081K0VP
Preliminary Datasheet V1.0


($V_{DS} = 50\text{ V}$, $V_{GS} = 0\text{ V}$)					
Gate--Source Leakage Current ($V_{GS} = 6\text{ V}$, $V_{DS} = 0\text{ V}$)	I_{GSS}	---	---	1	μA
Gate Threshold Voltage ($V_{DS} = 50\text{ V}$, $I_D = 600\text{ uA}$)	$V_{GS(th)}$	---	1.6	---	V
Gate Quiescent Voltage ($V_{DD} = 50\text{ V}$, $I_{DQ} = 100\text{ mA}$, Measured in Functional Test)	$V_{GS(Q)}$		3.0		V

Functional Tests (In Yingtron test fixture, 50 ohm system) : $V_{DD} = 50\text{ Vdc}$, $I_{DQ} = 100\text{ mA}$, $f = 440\text{ MHz}$, Pulse CW Signal Measurements. (Pulse Width=100 μs , Duty cycle=10%).

Power Gain @ $P_{OUT}=1060\text{ W}$	G_p	---	19.3	---	dB
Output Power	P_{out}	---	1060	---	W
Drain Efficiency@Pout	η_D	---	68.5	---	%
Input Return Loss	IRL	---	-7	---	dB

Figure 1: 440MHz Pulsed CW gain and efficiency as a Function of Output Power

Pulse width 100us and duty cycle 10%

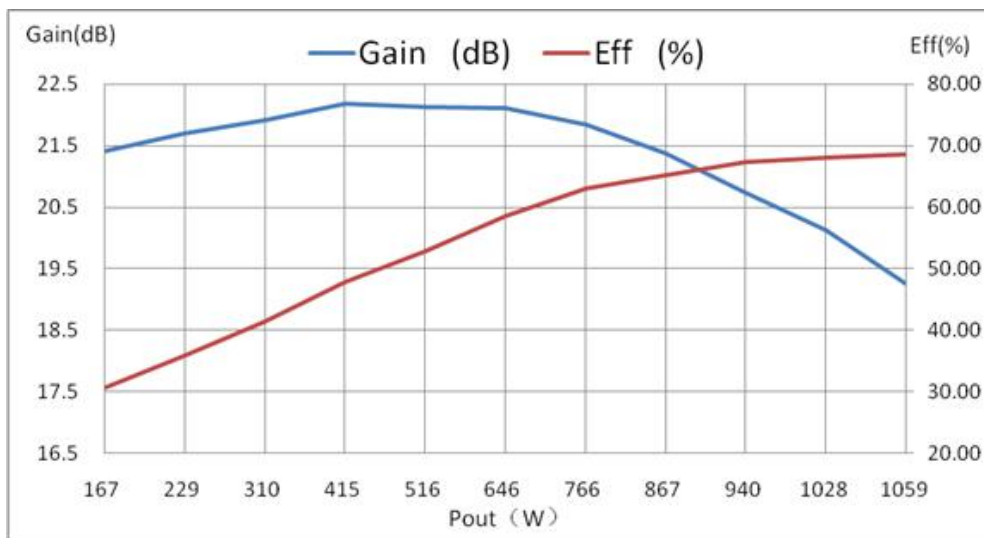


YC081K0VP LDMOS TRANSISTOR

Document Number: YC081K0VP
Preliminary Datasheet V1.0

Package Outline

Flanged ceramic package; 2 mounting holes; 4 leads (1, 2—DRAIN, 3, 4—GATE, 5—SOURCE)

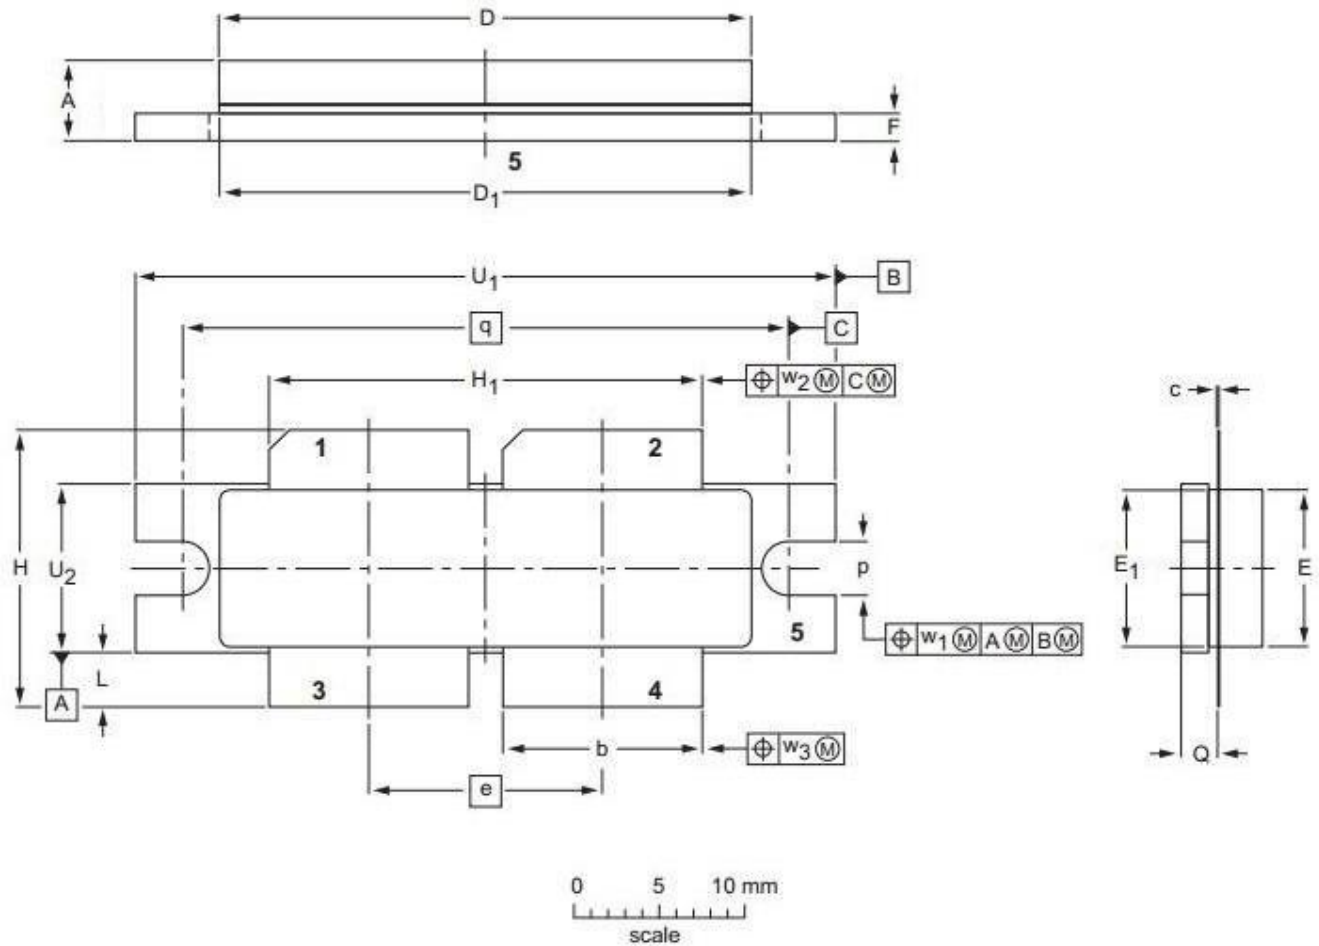

UNIT	A	b	c	D	D ₁	e	E	E ₁	F	H	H ₁	L	p	Q	q	U ₁	U ₂	W ₁	W ₂	W ₂
mm	4.7	11.81	0.18	31.55	31.52	13.72	9.50	9.53	1.75	17.12	25.53	3.48	3.30	2.26	35.56	41.28	10.29	0.25	0.51	0.25
	4.2	11.56	0.10	30.94	30.96		9.30	9.27	1.50	16.10	25.27	2.97	3.05	2.01		41.02	10.03			
inches	0.185	0.465	0.007	1.242	1.241	0.540	0.374	0.375	0.069	0.674	1.005	0.137	0.130	0.089	1.400	1.625	0.405	0.01	0.02	0.01
	0.165	0.455	0.004	1.218	1.219		0.366	0.365	0.059	0.634	0.995	0.117	0.120	0.079		1.615	0.395			

OUTLINE VERSION	REFERENCE			EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA		
PKG-D4E					03/12/2013

YC081K0VP LDMOS TRANSISTOR

Document Number: YC081K0VP
Preliminary Datasheet V1.0

Revision history

Table 5. Document revision history

Date	Revision	Datasheet Status
2017/11/14	Rev 1.0	Preliminary Datasheet Creation

Disclaimers

Specifications are subject to change without notice. Yingtron believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Yingtron for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Yingtron. Yingtron makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Yingtron in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Yingtron products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Yingtron product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility. For any concerns or questions related to terms or conditions, pls check with us.

Copyright by Yingtron Microwave Electronics Co., Ltd.